
SUNVIG® KARAOKE SOLUTIONS

CONNECTION DIAGRAM

SUNVIG PLAYPANEL //COMPACT + AMPLIFIER BEHIND LCD

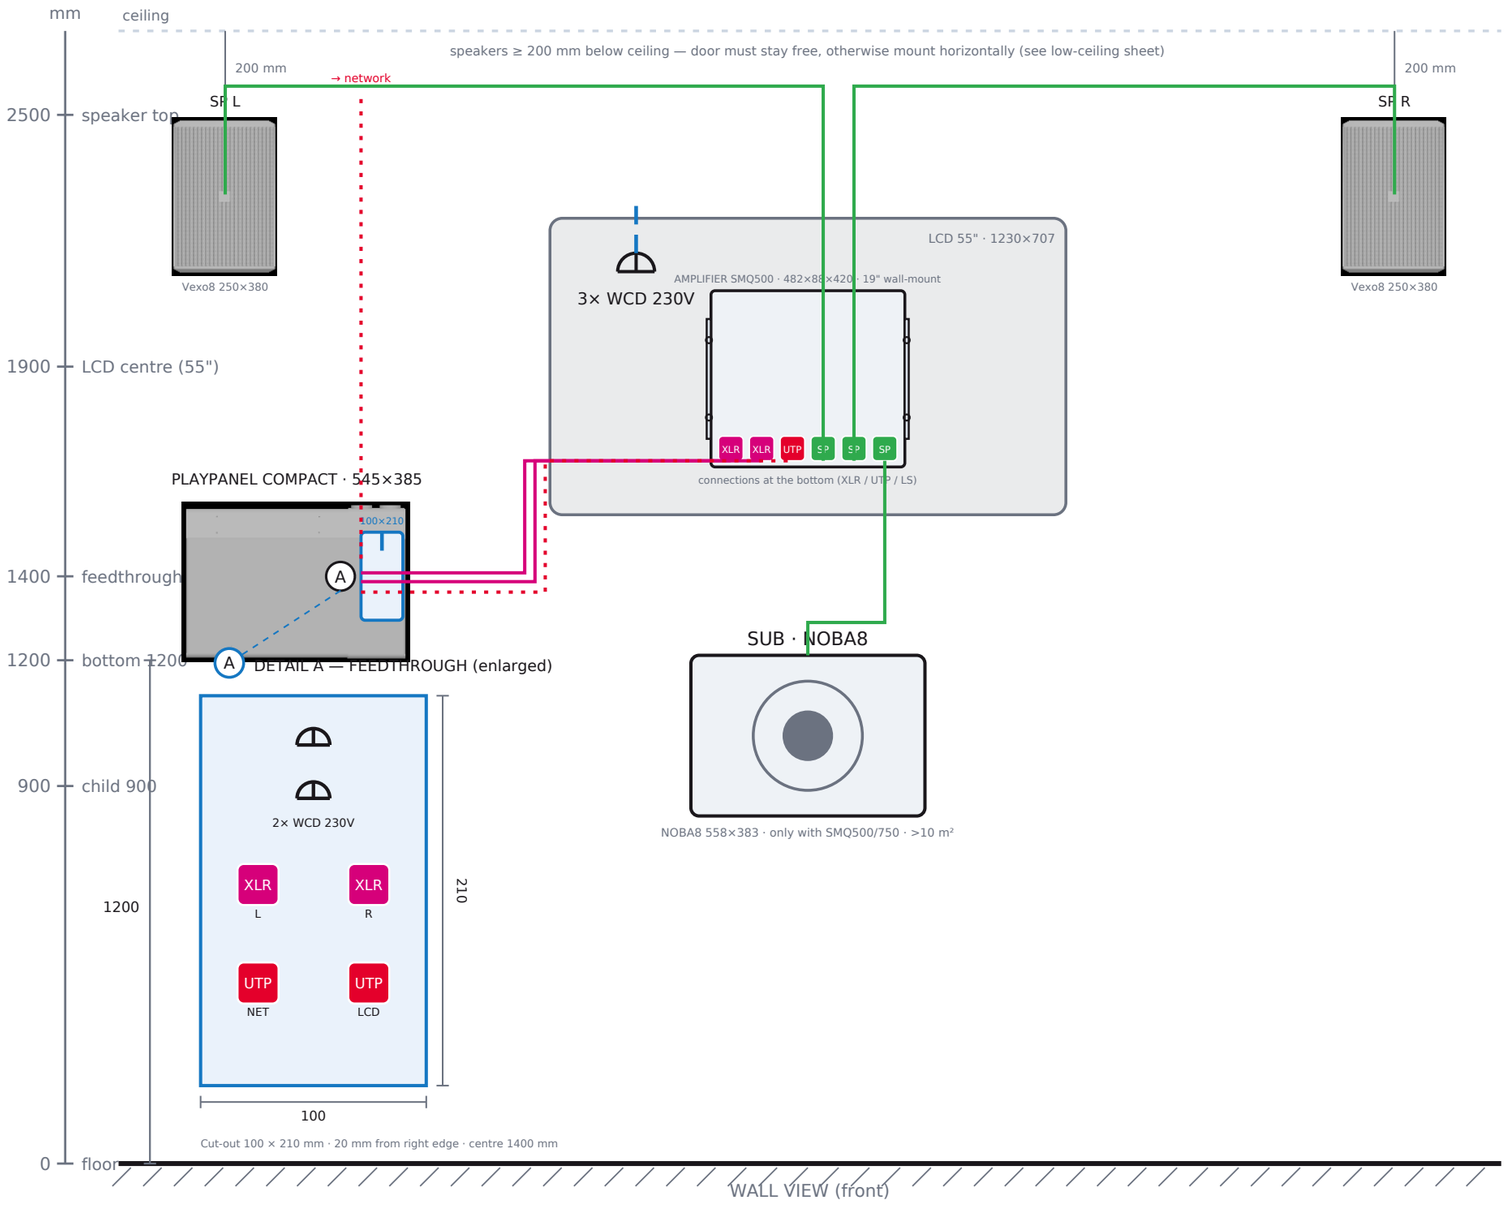

Symbols per NEN-EN-IEC 60617 · building substrate per construction-drawing convention · UTP/XLR no flush box (cable 1 m from the wall)

FEEDTHROUGH (system): rectangular feedthrough in the bracket (p4)

VIDEO — TV SIZE (centre height)

85"	variable
65"	variable
55"	1900 mm (centre)
43"	variable

AUDIO — AUDAC (W×H×D mm)

Speaker Vexo V10	329×540×345
Speaker Vexo 8	250×380×262
Speaker Vexo 108	244×425×258
SUB NOBA 8	555×383×149
Amplifier	482×88×420

KARAOKE SYSTEM (W×H×D mm)

PlayPanel Compact	545 × 385 × 124
15" built-in screen	model 25-09770

CABLES — LEGEND

- 230V (socket)
- XLR (mic, balanced)
- UTP (network)
- Loudspeaker (LS)

WALLS

Wall build-up and material specification are provided per project.
Contact sales@sunvig.com or +31 78 711 2548.

ELECTRICAL

230V · 1250W per room, on the same circuit

UTP/XLR: no flush-mounted box — cable 1 m from the wall

SUNVIG — KTV-EC PlayPanel Compact — Connection Diagram	DRAWING No. SV-CONN-CP-01	REV A
DESIGNED & APPROVED BY Mr. F.M. van Ketel DATE OF APPROVAL 07-09-2026	MODEL No. 25-09770	VERSION 1.0
Standard base diagram Indicative — final approval by qualified installer	MODEL SERIES PlayPanel Compact	SCALE · SIZE schematic · A3